

168 A

T. 16S R. 26E.
Section 34
SE 1/16 corner


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
(Reference FSH 5681.65)

State of Oregon) ss.
County of Harney)

History of original corner establishment:

I, **Marcellus A. Palmer**,
do hereby certify that on the 26th
day of July, 1964,
I found evidence of the established
monument as described hereon
for the Southeast 1/16 corner
of the Southeast 1/4 of Section 34,
township 16S, range 26E,
meridian Willamette.

as described hereon, and that from
this evidence I established a new
monument and accessories as
described hereon to perpetuate the
original location of this corner.
*DIAGRAM C/4 S E 1/4 SEC.

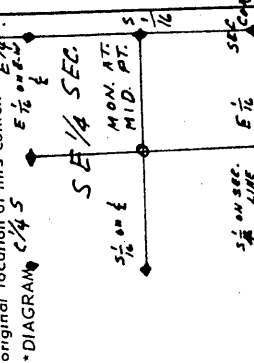

Description of corner evidence found:

Established by single proportionment between 1/16 section corner
established in S.L. M. Dependent Resurvey of 1960, and the
South 1/16 corner on center line established previously during
this survey.

Dated at Burns, Oregon
this 16th day of November, 1964
Signature *Marcellus A. Palmer*
Title Land Surveyor
Registration No. 350

State of Oregon) ss.
County of Harney)
On this 16th day of November, 1964,
before me, a notary public in and for
said state, personally appeared

Marcellus A. Palmer, known
to me to be the person whose name is
subscribed to the within instrument and
who acknowledged to me that he exe-
cuted the same.

Marion E. Sullivan
NOTARY PUBLIC
Residing at Harney County, Ore.
Commission expires 9/18/65

Office of _____ County of _____
State of _____, I hereby certify that the within instrument was filed in this office
for record on the _____ day of _____, 19____ at _____ o'clock _____ m., (signed)
by _____ (DEPUTY)
(COUNTY OFFICIAL)

Description of monument and accessories I established to perpetuate the
original location of this corner

Monument consists of a 2 1/2 inch brass disk welded to the top of a 2 inch
galvanized iron pipe, approximately 30 inches in length, buried approx-
imately 20 inches in the ground with a mound of rock set around the base.
Flat piece of steel is welded to the base of the monument.

T16S R26E
SE 1/16
S 34
ORE 350 1964

Disk is stamped with metal dies as follows