TOWNSHIP RANGE WILL. MER.

FOR

No. 182

T. 17S. R 26E.
Section 3
SW Section corner

State of Oregon)
County of Harney) ss.

I, Marcellus A. Palmer
do hereby certify that on the 2nd
day of September, 19 64
~~I found evidence of the~~ I established the Southwest Section corner of Section 3.

township 17S range 26E
meridian Willamette
as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

*DIAGRAM

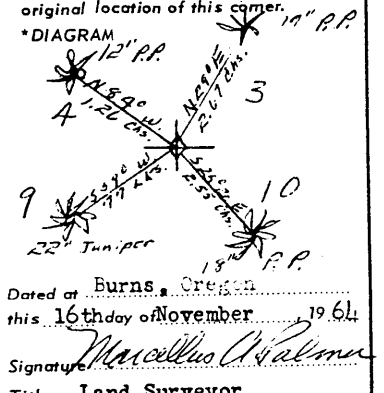

Dated at Burns, Oregon
this 16th day of November, 1964
Signature Marcellus A Palmer
Title Land Surveyor
Registration No. 350

Page 182

#53864

State of Oregon)
County of Harney) ss.
On this 16th day of November, 19 64
before me, a notary public in and for said state, personally appeared

Marcellus A. Palmer, known to me to be the person whose name is subscribed to the within instrument and who acknowledged to me that he executed the same.

Marian E. Sutherlin
(SEAL) NOTARY PUBLIC

Residing at Harney County, Ore.
Commission expires 9-18-65

Form R6-5680-182

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Original corner set in 1874 by G. L. O. by private contractor. Field notes call for an unmarked rock 16 X 12 X 8. No accessories noted. (Closest tie is 30 chains south which is a summit of a ridge.) No other ties in any direction except the closest corners which were quarter section corners. No knowledge of this corner could be obtained from any local resident contacted.

Description of corner evidence found:

None found. Location re-established by double proportionment between the closest found corners north and south, and east and west.

Description of monument and accessories I established to perpetuate the original location of this corner

Monument consists of a 2½ inch brass disk welded to the top of a 2 inch galvanized iron pipe, approximately 30 inches in length, buried approximately 20 inches in the ground with a mound of rock set around the base. Flat piece of steel is welded to the base of the monument. Disk is stamped with Metal dies as follows:

T17S R26E

4 | 3
9 | 10

ORE
350 1964

From which:
A 19" P.P. bears N 29° E 2.67 chains
An 18" P.P. bears S 25° 20' E 2.55 chains
A 22" Juniper bears S 59° W 77 links
A 12" P.P. bears N 84° W 1.26 chains

Office of ..... County of .....
State of ....., I hereby certify that the within instrument was filed in this office
for record on the ..... day of ....., 19....., at ..... o'clock .....m., (signed)
by ..... (DEPUTY)
(COUNTY OFFICIAL)