


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Established in 1884 by William R. Gradon under contract number 497, dated March 7, 1884. Surveyor General's records state :

Set a basalt stone 10x8x8 ins 6 ins in the ground for 1/4 sec cor marked 1/4 on North face from which

- a pine 28 ins diam bears N. 10° E 30 lks dist. marked 1/4S BT
- a pine 20 ins diam bears S. 30° W 51 lks dist. marked 1/4S BT

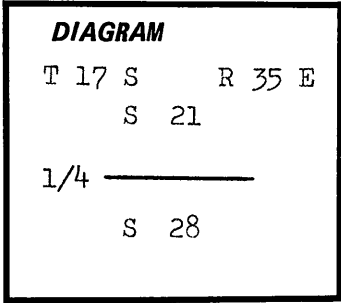


Description of corner evidence found:

- I found a stone 11x10x7 marked with a 1/4 on south face. Stone has been painted red.
- I found a 30" PP bears N. 15° E., 20.6 ft distant, painted yellow with BT tag. Scribing barely visible.
- I found a 28" PP, bears S. 20° W., 41.0 ft distant, blaze grown over, not opened up. Banded with red paint.

Both BT's have BT signs and Attention signs

Description of monument and accessories I established to perpetuate the original location of this corner:

At the location of the marked rock I set a standard F. S. monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a 4 x 4 1/2" footplate, buried 22" upright in the ground with 8" protruding. The marked rock is buried alongside. Disk on the monument is marked as shown.

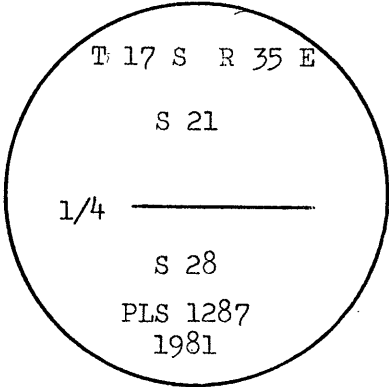

Work done: Nov. 13, 1981
 Witnesses: P. Zabala
 H. Palmer.

Office of..... Surveyor County of..... Grant

State of..... Oregon, I hereby certify that the within instrument was filed in this office for record on the..... 23 day of..... Nov, 19..... 81

Robert D. Bartz by.....

(COUNTY OFFICIAL) (DEPUTY)