


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Not previously established

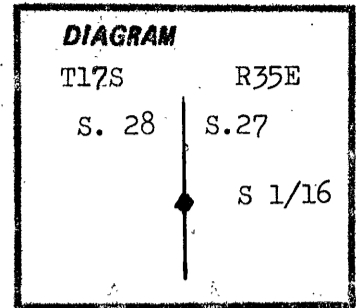

**Description of corner evidence found:**

A steel fence post was found 15 ft north and 5 ft east of corner location. Blazed lines run north and south from this point. These lines were run by Bert Udell as evidenced by location tags. No dates on tags.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the established location of the corner I set a standard Forest Service aluminum monument consisting of a 3" disk mounted on a 2 1/2 x 30" post with a 4 x 4 1/2" footplate buried 24" deep with 6" protruding above the ground, and surrounded by a 6" x 3' rock mound. The disk on the monument is stamped as shown. New BT's were established as follows:


- an 11" Ponderosa Pine bears N. 55° E., 12.8 ft distant, scribed S 1/16 S27 BT
- an 8" Ponderosa Pine bears S. 84° 33' W., 20.2 ft distant, scribed S 1/16, S28, BT

Both are banded with red paint, carry BT and Attention signs and have brass disks stamped PLS 1287 nailed at the base of the BT blaze, Steel fence posts with boundary signs lie 3' north and east of the corner monument.

Monument set 6/1/82 and witnessed by P. Zabala and S. Moss.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
*Charles F. Palmer*  
OREGON  
SEPTEMBER 23, 1977  
CHARLES F. PALMER  
1 2 8 7

Monument disk stamped -----

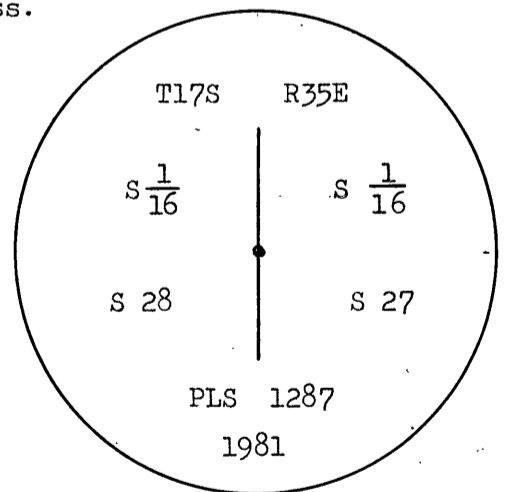

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 23 day of Nov, 1982  
Robert W. Dwyer by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)