COTAM Sec 27 "J"

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously established.



Description of corner evidence found:

Found a steel fence post 2 feet SW of corner location. Blazed lines run S and W

Description of monument and accessories I established to perpetuate the original location of this corner:

At the location of the corner I set a standard U.S.F.S. all aluminum monument consisting of a 3" disk mounted on a 2½x30" pipe with a 4x4½" footplate, buried 22 inches with 8 inches protruding above the ground. Disk is stamped as shown. Monument set August 20, 1982 witnessed by Pedro Zabala.

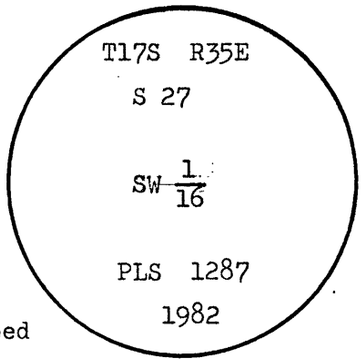

Monument is surrounded by mound of stone, 2 feet diameter by 6 inches in height.

B.T.'s established :-

A 10 inch Pond. Pine bears S. 55°00' E. 16.5 feet distant, scribed SW 1/16, S 27, BT

A 16 inch Pond Pine bears S. 55°30' W. 27.5 feet distant, scribed SW 1/16, S 27, BT.

Both are banded with red paint, carry BT and Attention signs, and have brass disks stamped PLS 1287 nailed at the base of the BT blaze



Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Nov, 19 82
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆GPO—798-276

Grant County Survey No. 736

U-14