


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

Established in 1884 by William R. Gradon under contract number 497, dated March 7, 1884. Surveyor General's records state :
 Set a basalt stone 15x6x6 ins 10 ins in the ground for 1/4 sec cor marked 1/4 on north face from which
 A pine 12 ins diam bears N. 15° E. 18 lks dist marked 1/4S BT
 A pine 20 ins diam bears S. 40° E. 28 lks dist marked 1/4S BT

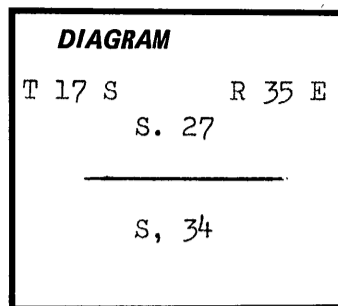


Description of corner evidence found:

I found a stone 15x9x6 marked with a 1/4 on the south face, in a small mound of stone. No evidence of the original BT's was found. Area has been previously logged.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the location of the marked rock I set a standard F. S. aluminum monument, consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a 4 x 4 1/2" footplate buried upright 15" in the ground with 15" protruding and surrounded by a mound of stone 4 ft in diameter. The original corner rock is buried alongside. The disk on the monument is stamped as shown.

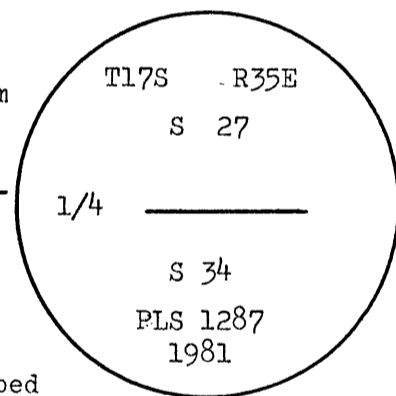

- A 9" douglas Fir bears N. 31° E. a distance of 21.1 feet, scribed ~~T17S R35E, S. 27 1/4 BT, S 27, PLS 1287, 1981~~
- A 15" Ponderosa Pine bears S. 09° E. a distance of 49.0 feet, scribed ~~T17S R35E, S. 34, 1/4 S 34, BT~~

Both are banded with red paint, carry BT and Attention signs and have brass disks stamped PLS 1287 nailed at the base of the BT blazes.

Work done: Nov. 12, 1981
 Witnesses: Pedro Zabala,
 H. Palmer

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR
Charles F. Palmer
 OREGON
 SEPTEMBER 23, 1977
 CHARLES F. PALMER
 1 2 8 7

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 23 day of Nov, 1982
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)