


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

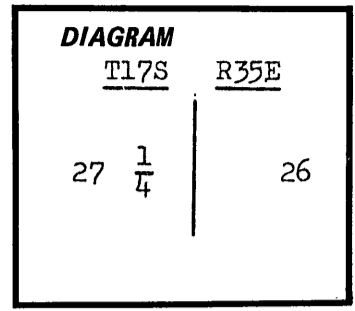

Original corner established by William R. Gradon in 1884, under contract number 497, dated March 7, 1884.

Surveyor General's records state:-


- Set a basalt stone 15x12x8 ins 10 ins in the ground for 1/4 sec cor marked 1/4 on W. face, from which
 - a pine 24 ins diam bears N. 20° E 3/4 lks dist. marked 1/4 S BT
 - a pine 30 ins diam bears S. 40° W. 51 lks dist. marked 1/4 S BT

Description of corner evidence found:

Searched for, nothing found.

Description of monument and accessories I established to perpetuate the original location of this corner:

On August 18, 1982 at the proportionate distance between found corners I set a standard USFS all aluminum monument, consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with a 4 x 4 1/2" footplate. The disk is stamped as shown. Witnessed by Pedro Zabala. Monument is buried 4 inches in the ground, with 26 inches above the ground and surrounded by a mound of stone 4 feet in diameter by 24 inches high.

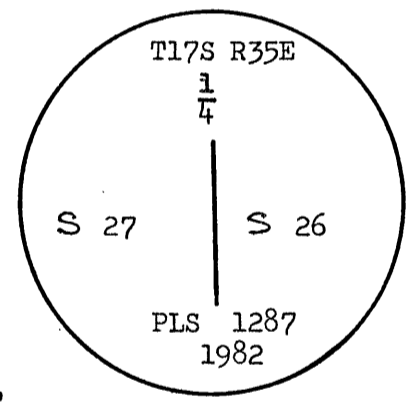

New BT's established:

- A 15 inch Ponderosa pine bears S. 57°15' W., 31.9 feet distant, scribed 1/4 S 27, BT.
 - a 14 inch Douglas Fir bears S. 5°35' E., 45.2 feet distant, scribed 1/4 S 26, BT
- Both BT's are banded with red paint, carry BT and Attention signs, and have brass disks stamped PLS 1287 nailed at the base of the BT blaze

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Charles F. Palmer

OREGON
SEPTEMBER 23, 1977
CHARLES F. PALMER
1287

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon*, I hereby certify that the within instrument was filed in this office for record on the..... *23* day of..... *June*, 19..... *82*

..... *Robert D. Dazett* by.....
(COUNTY OFFICIAL) (DEPUTY)