


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner established by Henry W. Cooke in 1883 under contract no. 488, dated August 11, 1883. Surveyor General's records state:

Set a basalt 18x16x10 ins 12 ins in the ground for cor to secs 25 and 36 marked with 1 notch on S. and 5 notches on N. edges and raised a mound of stone 4 ft. high 4½ ft base alongside.

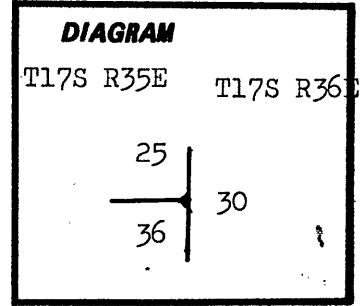


**Description of corner evidence found:**

At the assumed corner location I found a 18x15x9 stone with 5 notches on the N. face and 1 notch on the S. face in an old mound of large stone

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the location of the marked rock I set a standard USFS all aluminum monument consisting of a 3" disk mounted on a 2½x30" pipe with a flared base, buried 12 inches with 18 inches protruding above the ground, surrounded by a mound of rock 4 ft in diameter by 24 inches high. Disk is stamped as shown. Set July 15, 1982, witnessed by Pedro Zabala.

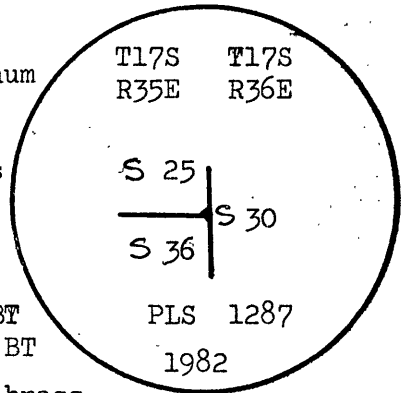

**New BT's established:**

A 14" P. pine bears S. 54°14' W., 75.8 ft, scribed T17S R35E S36 BT  
 A 8" W. juniper bears N. 69°15' E, 57.8 ft, scribed T17S R36E S30 BT

Both banded with red paint, carry BT and Attention signs and have brass disks stamped PLS 1287 nailed at the base of the BT blazes.

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR  
*Charles F. Palmer*  
 OREGON  
 SEPTEMBER 23, 1977  
 CHARLES F. PALMER  
 1287

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 23 day of May, 1982  
Robert D. Dwyer by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)