


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

④
23

History of original corner establishment:

Corner not established in original survey

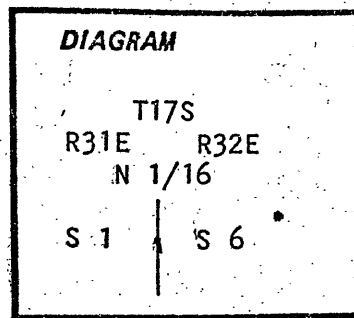

No record of subsequent monumentation found in County records
Description of corner evidence found:

NONE

See survey dated October, 1981
Description of monument and accessories established to perpetuate the original location of this corner:


At corner point I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 18 inches in the ground from which:

NEW BTs

A 20 inch P. Pine bears N62E, 55.6 Feet marked N1/16 S6 BT

A 12 inch Red fir bears N5W, 91.5 Feet marked N1/16 S1 BT

Raised mound of stone 4 ft. at the base to top of cap

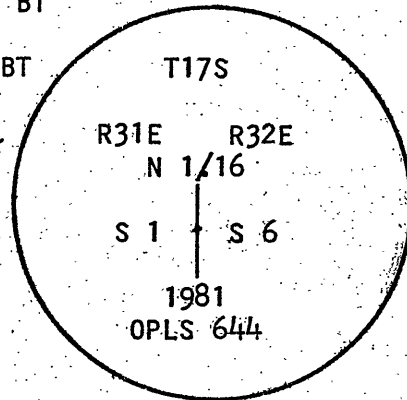

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Duggett
OREGON
JULY 10, 1968
DUANE I. GRIFFITH
644

Date, October 6, 1981.
Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 23 day of Dec, 1981
Robert D. Duggett by _____
(COUNTY OFFICIAL) (DEPUTY)