

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

58
7

History of original corner establishment:

Corner established in 1884 by Henry W. Cooke under General Land Office contract #494

Surveyor General record states;

Set basalt stone 18x16x8 ins. for cor. marked with 5 notches on the S and 3 notches on the E edges from which;


- A Pine 40 ins. diam. bears N30E, 63 lks
- A Pine 15 ins. diam. bears N35W, 160 lks
- No other trees within limits

Raised mound of stone alongside

No record of subsequent remonumentation was found in the County records

Description of corner evidence found:

Found stone call size, faint marks, loose on ground near corner position, and 1 BT

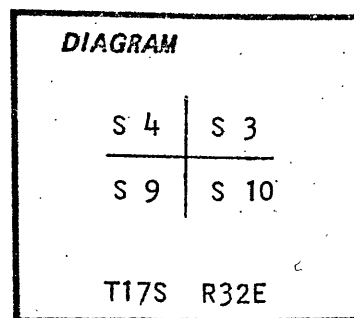

See map of survey dated October 1981

Description of monument and accessories established to perpetuate the original location of this corner:

At record bearing and distance from BT, I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown, 16 inches in the ground, from which;

ORIGINAL BT

A 40 inch P.Pine bears N30E, 41.6 feet, live and vigorous, scribes visible


NEW BTs

A 28 inch P.Pine bears S53E, 47.7 feet, marked T17S R32E S10 BT

A 16 inch P.Pine bears N31W, 146.6 feet, marked T17S R32E S4 BT

A 6 inch spike driven into rock outcrop bears S46W, 10.9 feet

Buried stone North and alongside of pipe
Raised mound of stone 4 feet at base to top of pipe

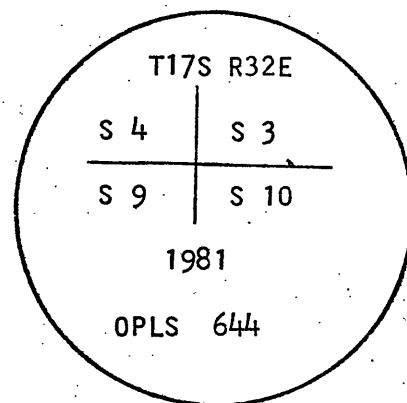

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Date. September 14, 1981

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 21° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 23 day of Dec, 1981
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)