

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


#2

**History of original corner establishment:**

Originally established by William R. Gradon in 1884, under contract number 497, dated March 7, 1884. Surveyor General's records state:

80.00 Set a basalt stone 28x8x4 ins 20 ins in the ground for corner to secs 14, 15, 22 and 23 marked with 3 notches on the S. and 2 notches on the E. edges from which

- a pine 12 ins diam bears N. 50° E 71 lks dist. marked T17S R35E S14 BT
- a pine 18 ins diam bears S. 60° E. 46 lks dist. marked T17S R35E S 23 BT
- a pine 14 ins diam bears S. 35° W. 28 lks dist. marked T17S R35E S 22 BT
- a pine 28 ins diam bears N. 40° W. 30 lks dist. marked T17S R35E S 15 BT

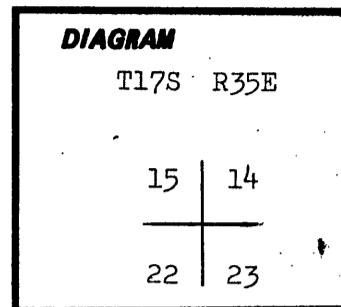

**Description of corner evidence found:**

I found a 24x10x4 stone marked with 2 notches on S. and 3 notches on E. edges in a large mound of stone. One BT, a 20" P. Pine bearing N. 41°50' E., 44.8 ft distant.

Found a 28" Fir snag lies N. 40° W., approx. 25 ft distant, scribing on under side.


A 20" pine bears N E with BT and Attention signs, scribing can be seen in blaze.

A 22" fir stump bears S E, no scribing visible.

No definite evidence of SW BT. Several stump holes, ground pretty well torn up by Cat

**Description of monument and accessories established to perpetuate the original location of this corner:**

At the location of the marked rock I set a standard USFS all aluminum corner monument consisting of a 3" disk mounted on a 2 1/2 x 30" pipe with an aluminum footplate 4x4 1/2", all buried 18" in the ground with 12" protruding and surrounded by a mound of rock 3 feet in diameter by 12 inches in height. Marked rock is buried alongside. Disk is stamped as shown. Set 8/19/82, and witnessed by Pedro Zabala.

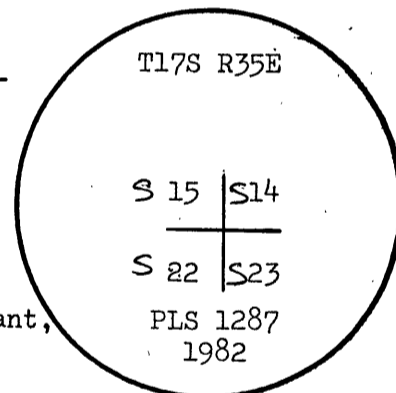

Original BT:- a pine 20 ins diam bears N. 41°50' E, 44.8 ft distant, scribing barely visible.

New BT's:

- a 12" Douglas fir bears S. 40°50' E., 60.5 ft. distant, scribed T17S R35E, S 23, BT
- an 8" W. Juniper bears S. 30°20' W. 49.1 ft. distant scribed T17S R35E S 22 BT
- an 8" W. Juniper bears N. 33°30' W., 13.1 ft. distant, scribed T17S R35E S 15 BT

All BT's are banded with red paint, carry BT and Attention signs and have brass disks stamped PLS 1287 nailed at the base of the BT blazes.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Charles F. Palmer*

OREGON  
SEPTEMBER 23, 1977  
CHARLES F. PALMER  
1 2 8 7

Office of..... *Surveyor* ..... County of..... *Grant* .....

State of..... *Oregon* ....., I hereby certify that the within instrument was filed in this office for record on the..... *23* day of..... *Nov* ....., 19..... *82* .....

..... *Robert D. Dugitt* ..... by .....

(COUNTY OFFICIAL) (DEPUTY)