


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Sections 2&3, T.7S., R.26E., W.M.

E-15

History of original corner establishment:

Aaron F. York, under G.L.O. contract, dated Nov. 18, 1878, set a stone 12"X 8"X7" and raised a stone mound at the corner.

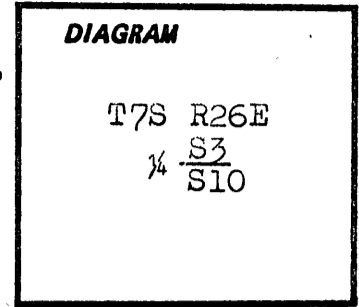

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½"X30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I built a stone mound around the monument.

from the corner:

- A Ponderosa Pine, 6" dia., N17½°W, 29.9 ft.; marked: ¼ S3 BT
- A Juniper, 7" dia., S62°W, 56.5 ft.; marked: ¼ S10 BT

T7S R26E
¼ $\frac{S3}{S10}$
PLS 1832
1985

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 19¼°E.

September 2, 1985

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*86*
Robert D. Baggett by *Fayette S. Munro*
(COUNTY OFFICIAL) (DEPUTY)