


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

MAP OF SURVEY 1298  
1298

F17

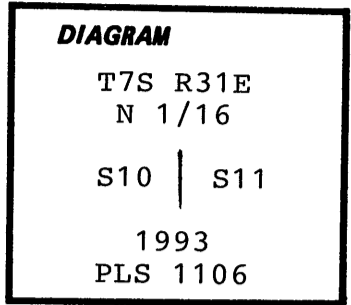

History of original corner establishment:  
None. Corner established as part of this survey.

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At position determined by survey. . .

Set 2 1/2" X 30" aluminum pipe with 2 1/2" aluminum cap 27" in the ground and surrounded with a mound of stone. Cap is marked as shown in corner of diagram.

Set steel fence post 3.9 feet West of monument with sign 54-9 and 54-2 attached.

New accessories established:

A 16" ponderosa pine bears S 28 1/2° E - 41.4 feet, scribed: N 1/16 S11 BT.  
A 1'X5'X2' basalt outcrop at West edge of creek bears N 73° W - 39.0 feet, with 'XBO' chiseled 1.0 feet above ground, on East face.

New bearing tree has a brass washer stamped 'PLS 1106' nailed to face of blaze. Attached sign 54-3 and 54-9, painted face of blaze and a 6" red band around the bearing tree. XBO has sign 54-3 attached to face with aluminum nail, measured to X, and painted marking red.

I hereby certify that the above corner monument was properly established to U.S.F.S. standards by me on August 24, 1993.

Compass declination 18° East.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

RENEWS 12-31-94

Office of Sherman County of Grant  
State of Oregon I hereby certify that the within instrument was filed in this office  
for record on the 4 day of Mar, 1994  
Robert D. Smith by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)