


Book "1" Page 191
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner established in 1881 by Meldrum & Campbell, under General Land Office Contract No. 380. Surveyor General records state: Set a basalt stone 16x8x6 for 1/4 sec. cor. from which a Pine 24 in. dia. bears N22°W, 69 lks. dist.
" 24 " " " N12°E, 90 " "

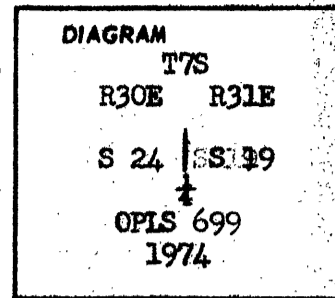

Description of corner evidence found:

Found a rock mound, but could find no markings. Both original BT's are in good condition and have grown to about 28" in diameter.

Description of monument and accessories established to perpetuate the

original location of this corner Set in the center of the rock mound a 2"x30" galvanized pipe with a flared end and 2 1/2" brass cap 18" in the ground to bedrock. Improved the rock mound to 12" high and 36" in diameter. Set a 4"x4"x6' redwood post 18" in the ground 4' North of monument with signs 54-2 & 54-4 as a guard post for the corner. Scalped bark and painted red band around Bearing Trees and posted signs 54-3 with the following information:

28" P. Pine S22°E 47.1'
26" P. Pine S12°W 59.6'


I hereby certify the above corner monument was re-established as herein described on August 21, 1974.

REGISTERED PROFESSIONAL LAND SURVEYOR

Leland Lee Myers

OREGON JULY 9, 1965 LELAND LEE MYERS 699

74829

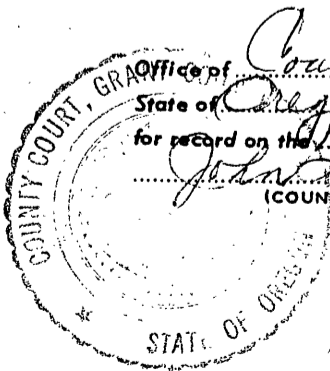

Office of County Clerk County of Grant State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 19th day of Nov. 1974 (78:34) in Book 1, Page 191 Surveyor's Record by John Hoover (COUNTY OFFICIAL) by Betty Lowery (DEPUTY)

INDEXED