


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-03

History of original corner establishment:

1883, Frank W. Campbell, U.S. Deputy Surveyor, established the corner while surveying the township line under G.L.O. Contract No. 468. He set a Post 3' long by 3" square, 24" in the ground, from which; 5" Pine, S. 20° W., 9 links. 15" Fir, N. 40° E., 43 links.


1993, Dennis L. Gaylord, Registered Land Surveyor No. 1636, found the original NE BT and set at record bearing and distance, a 2 1/2" by 30" aluminum pipe, with 3 1/4" aluminum cap, 28" in the ground surrounded by a small mound of stones, from which; 28" Douglas Fir, N. 40° E., 28.38 feet, with healed double blaze (original BT). New BT's; 16" White Fir, N. 18° W., 27.5 feet. 16" White Fir, S. 55° E., 57.1 feet. 29" Douglas Fir, S. 56°30' W., 48.5 feet.

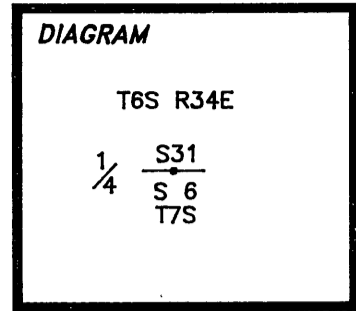

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH A 3 1/4" ALUMINUM CAP, PROJECTING 2" OUT OF THE GROUND, MARKED AS SHOWN, FROM WHICH:

- 28" DEAD DOUGLAS FIR, N 40° E, 28.4 FEET, WITH HEALED DOUBLE BLAZE (ORIGINAL BT). 16" DEAD WHITE FIR, S 53 1/2° E, 57.1 FEET, WITH BURNT OUT DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO THE LOWER BLAZE. 29" DEAD DOUGLAS FIR, S 56 1/2° W, 48.5 FEET, WITH BURNT OUT DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO THE LOWER BLAZE. 16" DEAD WHITE FIR, N 16 1/2° W, 27.5 FEET, WITH BURNT OUT DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO THE LOWER BLAZE.



Description of monument and accessories I established to perpetuate the original location of this corner:

- NEW REFERENCES: RM, 5/8" BY 24" REBAR WITH YELLOW PLASTIC CAP MARKED "UMATILLA N.F.", SET 23" IN THE GROUND, N 43° E, 20.03 FEET. RM, 5/8" BY 24" REBAR WITH RED PLASTIC CAP MARKED "UMATILLA N.F.", SET 23" IN THE GROUND, S 45° E, 15.43 FEET. RM, 5/8" BY 24" REBAR WITH RED PLASTIC CAP MARKED "UMATILLA N.F.", SET 23" IN THE GROUND, S 42 1/2° W, 28.90 FEET. RM, 5/8" BY 24" REBAR WITH YELLOW PLASTIC CAP MARKED "UMATILLA N.F.", SET 23" IN THE GROUND, N 47 1/2° W, 11.96 FEET.

GEOGRAPHIC POSITION DATUM: NAD83(1991) OREGON HIGH PRECISION NETWORK LATITUDE: 44°59'51.07854" North LONGITUDE: 118°40'02.35202" West ELLIPSOID HEIGHT: 1522.609 meters

MAGNETIC DECLINATION: 19° EAST

WORK PERFORMED BY: DAVID A. SCHLAICH (RLS 2308) WITNESSED BY: RACHELLE MARSHAL DATE: SEPTEMBER, 1997

REGISTERED PROFESSIONAL LAND SURVEYOR

David A. Schlaich

OREGON JULY 16, 1987 DAVID A. SCHLAICH 2308

RENEWS 06/30/98

Office of SURVEYOR County of GRANT State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 13 day of NOV 1997 by [Signature] (COUNTY OFFICIAL) [Signature] (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 1458