


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-17

History of original corner establishment:

1883, Frank W. Campbell, U.S. Deputy Surveyor, established the corner while surveying the township line under G.L.O. Contract No. 468. He set a Basalt stone 16" by 10" by 10", 10" in the ground, from which;
30" Pine, N. 79° E., 156 links.
18" Pine, S. 79° E., 126 links.
30" Pine, S. 63° W., 157 links.
36" Pine, N. 68° W., 189 links.

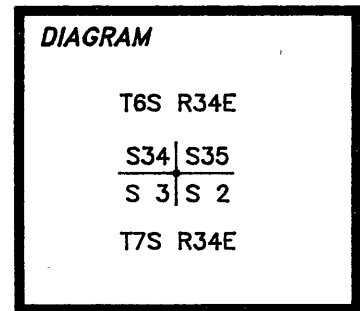


1985, Clayton-Jessie Martin, Registered Land Surveyor No. 1910, found evidence of the original bearing trees and set at record distance from all but the NE BT, a 2 1/2" by 30" aluminum pipe, with 2 1/2" aluminum cap, and raised stone mound (Grant County Map of Survey No. 909), from which;
28" Ponderosa Pine Snag, N. 83 1/2° E., 107.3 feet, scribing visible (original BT).
26" down Ponderosa Pine Snag, S. 82° E., 126 links (original BT).
39" Ponderosa Pine, S. 63° W., 157 links, scribing visible (original BT).
36" down Ponderosa Pine Snag, N. 65° W., 189 links, scribing visible (original BT).
Stone mound of unknown origin, N. 80°19' E., 71.5 feet.
New BT's;
6" Ponderosa Pine, N. 33° E., 17.1 feet.
8" Douglas Fir, S. 89° E., 73.7 feet.
10" Douglas Fir, N. 43° W., 65.7 feet.

1993, David A. Schlaich, Registered Land Surveyor No. 2308, found and tied to the corner while conducting a GPS control survey (Grant County Map of Survey No. 1310).

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH A 2 1/2" ALUMINUM CAP, PROJECTING 24" OUT OF THE GROUND SURROUNDED BY A STONE MOUND 3 1/2' IN DIAMETER BY 19" HIGH, MARKED AS SHOWN, FROM WHICH:
8" PONDEROSA PINE, N 33° E, 17.1 FEET, WITH SCRIBING VISIBLE ON PARTIALLY HEALED BLAZE AND 3/4" BRASS WASHER STAMPED "RPLS 1910" NAILED TO THE LOWER PART OF THE BLAZE.
STONE MOUND, 2 1/2' IN DIAMETER BY 16" HIGH, N 80 1/4° E, 71.5 FEET.
29" PONDEROSA PINE SNAG, N 83 1/2° E, 107.3 FEET, WITH SCRIBING VISIBLE ON PARTIALLY HEALED DOUBLE BLAZE (ORIGINAL BT).
10" DOUGLAS FIR, S 89° E, 73.7 FEET, WITH SCRIBING VISIBLE ON PARTIALLY HEALED BLAZE AND A 3/4" BRASS WASHER STAMPED "RPLS 1910" NAILED TO THE LOWER PART OF THE BLAZE.
38" PONDEROSA PINE, S 63° W, 103.6 FEET, WITH SCRIBING VISIBLE ON PARTIALLY CUT OPEN BLAZE (ORIGINAL BT).
24" DOWNED PONDEROSA PINE SNAG, N 65° W, 124.7 FEET, WITH SCRIBING VISIBLE ON UPPER BLAZE (ORIGINAL BT).
11" DOUGLAS FIR, N 43° W, 65.7 FEET, WITH SCRIBING VISIBLE ON PARTIALLY HEALED BLAZE AND 3/4" BRASS WASHER STAMPED "RPLS 1910" NAILED TO THE LOWER PART OF THE BLAZE.



Description of monument and accessories I established to perpetuate the original location of this corner:

GEOGRAPHIC POSITION
DATUM: NAD83(1991) OREGON HIGH PRECISION NETWORK
LATITUDE: 44°59'48.67175" North
LONGITUDE: 118°35'45.11579" West
ELLIPSOID HEIGHT: 1644.567 meters

MAGNETIC DECLINATION: 19° EAST

WORK PERFORMED BY: DAVID A. SCHLAICH (RLS 2308)
DATE: SEPTEMBER, 1997

REGISTERED PROFESSIONAL LAND SURVEYOR
David A. Schlaich
OREGON JULY 16, 1987
DAVID A. SCHLAICH 2308
RENEWS 06/30/98

Office of SURVEYOR County of Grant
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 13 day of NOV, 19 97
Grant D. Bryant by (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 145B