

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


D-18

History of original corner establishment:

1986, Clayton J. Martin, RPLS 1910, established this corner when he subdivided section 2 (Grant County Map Survey No. 909).

Martin set at the corner a 2" by 30" aluminum pipe, with a 2 1/2" aluminum cap and raised a stone mound, 4' by 6' by 4' high, from which:

- 6" Lodgepole Pine bears, S. 68° E., 4.8 feet.
- 5" Lodgepole Pine bears, S. 71° W., 17.9 feet.

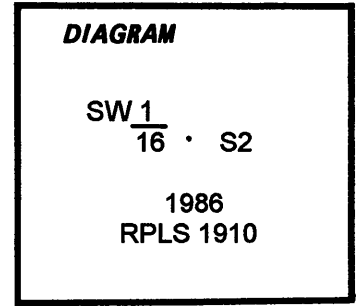

T 75 R 34 E

Description of corner evidence found:

Found a 2 1/2" aluminum pipe with 2 1/2" aluminum cap, projecting 18" out of the ground, 6" above a rock mound 6' in diameter, from which:

- 8" Lodgepole Pine bears, S. 71° W., 17.9 feet, with scribing visible on double blaze.
- 6" downed Lodgepole Pine (record, S. 68° E., 4.8 feet), with scribing visible on double blaze.

Both BT's have a 3/4" brass washer stamped "PLS 1910" nailed to the lower blaze.

Description of monument and accessories I established to perpetuate the original location of this corner:

Marked New BT:

9" Lodgepole Pine bears, S. 55 1/2° E., 11.2 feet, marked "SW1/16 S2" "BT" on a double blaze with a brass washer stamped "RLS 2308" nailed to the lower blaze by the "BT" scribing.

REGISTERED PROFESSIONAL LAND SURVEYOR

David A. Schlaich

OREGON
JULY 1987
DAVID A. SCHLAICH
2308

Expires 12/31/94

Magnetic Declination: 20° East

Work performed by: David A. Schlaich (RLS 2308)
Date: October 1993

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 2 day of Feb, 1994
Robert D. Bays by _____
 (COUNTY OFFICIAL) (DEPUTY)