


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was established in 1878 by A.F. York, a U.S. Deputy Surveyor under his contract #309.

Set stone 25" x 19" x 9" for 1/4 Sec. cor.
Raised stone mound at corner.

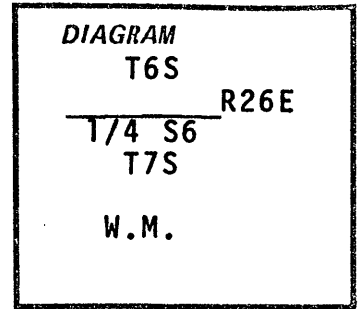

Description of corner evidence found:

Nothing Found


Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2"x30" G.I. pipe with a 2-1/2" brass cap mkd:

Exposed 24" then placed a mound of stone around the pipe

I mark a P. Pine 10" dia. bears S29°58'E 82.6 feet T7S, R26E, S6 BT
I mark a P. Pine 8" dia. bears N83°22'W 31.0 feet T6S, R26E, S31 BT

Monument set 4/24/81.



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kurt C. Weaver

OREGON
JULY 14, 1978
KURT C. WEAVER
1679

Office of **Surveyor** County of **Grant**
Oregon
State of _____, I hereby certify that the within instrument was filed in this office
for record on the 28 day of Oct, 1981
Robert D. Bigott by _____
(COUNTY OFFICIAL) (DEPUTY)