

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


Refer to: Plat of Wilson 1985 Cadastral Survey
Sections 2&3, T.7S., R.26E., W.M.

A-19

History of original corner establishment:

Aaron F. York, under G.L.O. contract number 309, dated Nov. 18, 1878, surveyed the north line of T7S, R26E. He set a stone 31"X 19"X 7" and raised a stone mound at the corner.

Edward W. Sanderson, under G.L.O. contract number 368, dated Sep. 7, 1880 retraced York's line and at this corner found a stone 24"X 18"X 14" in a stone mound.

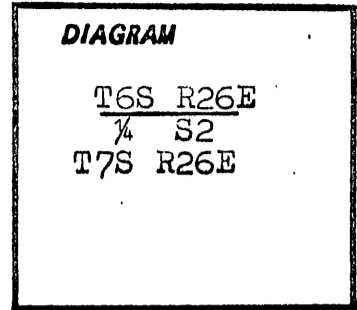

Description of corner evidence found:

I found a stone 28"X 15"X 7", with no marks visible, in a mound of stone.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the original corner point I set a 2½"X30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I buried the original stone alongside and built a stone mound around the monument.

From the corner:

- A Juniper, 9" dia., S86½°E, 89.5 ft.; marked: ¼ S2 BT
- A Juniper, 8" dia., S52¼°E, 114.3 ft.; marked: ¼ S2 BT

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 18½° E.

July 26, 1985

T6S R26E
¼ S2
T7S R26E
PLS 1832
1985

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon*, I hereby certify that the within instrument was filed in this office for record on the..... *19* day of..... *Jan*, 19..... *86*

..... *[Signature]* by
(COUNTY OFFICIAL) (DEPUTY)