


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was established in 1878 by A.F. York, a U.S. Deputy Surveyor under Contract #309.

Set stone 15" x 9" x 7" for 1/4 Sec. cor. raised stone mound at corner.

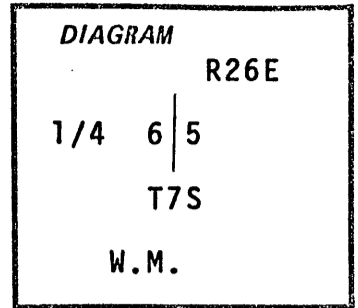

Description of corner evidence found:

Nothing Found

Description of monument and accessories I established to perpetuate the original location of this corner:


I set a 2"x30" G.I. pipe with 2-1/2 brass cap mkd:

Exposed 8" then placed a mound of stone at the proportion position

I mark a D. Fir 6" dia. bears N63°46'E 7.5 feet T7S, R26E, S5 BT

I mark a D. Fir 8" dia. bears N83°00'W 14.8 feet T7S, R26E, S6 BT

Monument set 4/24/81.



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kurt C. Weaver

OREGON
JULY 14, 1978
KURT C. WEAVER
1679

Office of **Surveyor** County of **Grant**

State of **Oregon** I hereby certify that the within instrument was filed in this office
for record on the 28 day of Oct 1981

Robert D. Skjott by
(COUNTY OFFICIAL) (DEPUTY)