


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Sections 2&3, T.7S., R.26E., W.M.

E-17

History of original corner establishment:

Aaron F. York, under G.L.O. contract number 309,
dated Nov. 18, 1878, set a stone 22"X 18"X 6" and
raised a stone mound at the corner.

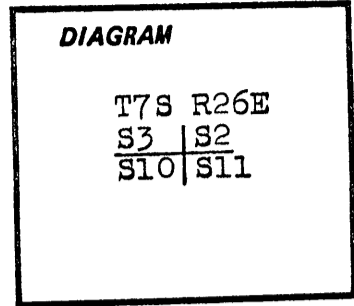

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the
original location of this corner:

At proportionate distance I set a 2 1/8"X 30" alum. pipe
with a 3" alum. cap containing a magnet and marked:

T7S	R26E
S3	S2
S10	S11
PLS 1832	
1985	

I built a stone mound around the monument.

From the corner:

- A Ponderosa Pine, 14" dia., N36°E, 31.2 ft.; marked: T7S R26E S2 BT
- A Ponderosa Pine, 12" dia., S77°E, 19.6 ft.; marked: T7S R26E S11 BT
- A Ponderosa Pine, 14" dia., S44 3/4°W, 17.3 ft.; marked: T7S R26E S10 BT
- A Ponderosa Pine, 15" dia., N61°W, 15.8 ft.; marked: T7S R26E S3 BT

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention"
sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze.
There is a 6' steel fence post with an "Attention" sign within 5'
of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic
declination set at 18 3/4°E.

September 14, 1985

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1985
Robert J. Bayne by Fayette S. Munro
(COUNTY OFFICIAL) (DEPUTY)