


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 36, T.7S., R.26E., W.M.

V-21
Page 2 of 2

History of original corner establishment:

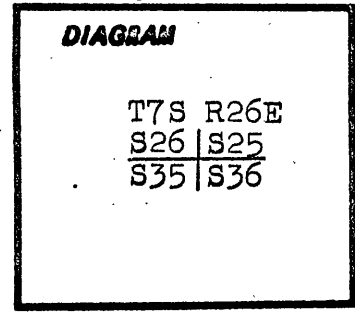

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner:

(Continued from Page 1 of 2)

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There are 6' steel fence posts with "Attention" signs within 5' of both the corner and the RM.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 17 1/2° E.

November 19, 1985



Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 10 day of Jan, 1986
Robert D. Stapp by _____
 (COUNTY OFFICIAL) (DEPUTY)