


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 36, T.7S., R.26E., W.M.

X-25

History of original corner establishment:

Aaron F. York, under G.L.O. contract number 309,,
dated Nov. 18, 1878,, set a stone 18"X 10"X 8"
from which:

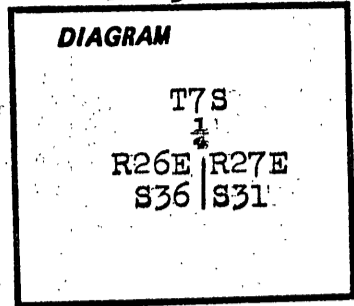

- A Pine, 32" dia., N40°E, 58 lks.
- A Pine, 24" dia., N89°W, 126 lks.

Description of corner evidence found:

I found a stone 17"X 9"X 7" firmly set in ground and marked: 1/4 S;
from which:


A Ponderosa Pine stump, uprooted and badly decayed, with no scribing visible; the root hole of which bears N32°E, 35 ft.

A rotten stump with a down tree alongside; scribing visible on neither.
Stump bears N86°W, 86 ft.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the original corner point I set a 2 1/2"X 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I buried the original stone alongside.



From the corner:

- A Ponderosa Pine, 10" dia., S40°E, 43.8 ft.; marked: 1/4 S31 BT
- A Ponderosa Pine, 6" dia., S43 3/4°W, 51.0 ft.; marked: 1/4 S36 BT

BTs have blaze and a 6" stripe painted red, a BT tag and an "Attention" sign. New BTs have, additionally, an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 18°E.

October 27, 1985

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832

Office of..... Surveyor County of..... Grant

State of..... Oregon, I hereby certify that the within instrument was filed in this office
for record on the... 10 day of... Jan, 19... 86

Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)