


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey  
Sections 2&3, T.7S., R.26E., W.M.

7-15

History of original corner establishment:

Edward W. Sanderson, under G.L.O. contract number 368, dated Sep. 7, 1880, set a stone 18"X 12"X 9" in a stone mound.

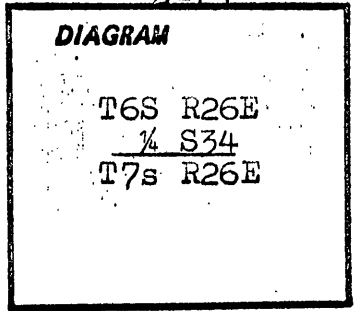

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½"X 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

T6S R26E  
¼ S34  
T7S R26E  
PLS 1832  
1985

From which:

A Douglas Fir, 11" dia., N81°W, 75.2 ft.; marked: ¼ S34 BT  
 A Ponderosa Pine, 8" dia., N22°W, 29.2 ft.; marked: ¼ S34 BT

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set a 17½°E.

September 3, 1985



Office of.....*Surveyor*..... County of.....*Grant*.....  
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office  
 for record on the.....*10*..... day of.....*Jan*....., 19.....*86*  
*Robert D. Gage* by.....  
 (COUNTY OFFICIAL) (DEPUTY)