


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 36, T.7S., R.26E., W.M.

Z-25

History of original corner establishment:

Alonzo Gesner, under G.L.O. contract number 266,,
dated June 20,, 1877,, set a stone 26"X 14"X 10"
and raised a stone mound at the corner.

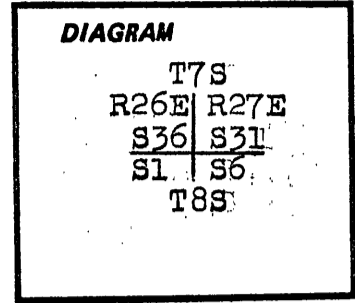

Description of corner evidence found:

I found a stone 23"X 14"X 12", with no marks visible,, in a large
stone mound..

Description of monument and accessories I established to perpetuate the
original location of this corner:

At the original corner point I set a 2 1/2"X 30" alum. pipe with a 3"
alum. cap containing a magnet and marked:

I buried the original stone alongside and built
a stone mound around the monument..

From the corner:

- A Ponderosa Pine, 7" dia., N14°W, 48.9 ft.
marked: T7S R26E S36 BT
- A Ponderosa Pine, 8" dia., N30 1/2°E, 46.6 ft.
marked: T7S R27E S31 BT
- A Juniper, 8" dia., S25°E, 49.0 ft.
marked: T8S R27E S6 BT
- A Ponderosa Pine, 8" dia., S39 1/4°W, 37.0 ft.
marked: T8S R26E S1 BT

T7S
R26E R27E
S36 S31
S1 S6
T8S
PLS 1832
1985

BTs have blaze and a 6" stripe painted red,, a BT tag,, an "Attention"
sign and an alum. "PLS 1832" washer nailed to the bottom of the
blaze. There is a 6' steel fence post with an "Attention" sign within
5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic
declination set at 17 1/2°E.

October 26, 1985.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*10* day of.....*Jan*....., 19.....*85*
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832