


CORNER RESTORATION

CORNER Sec. 6 ^{S $\frac{1}{4}$ cor} TWP 7S RANGE 29E

ORIGINAL SURVEY BY: Frank W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

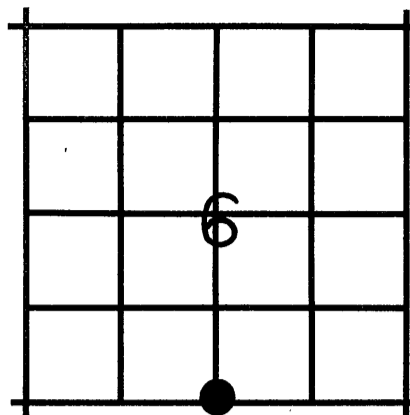

ORIGINAL DESCRIPTION:

N. 89° 35' E., on a true line bet. secs. 6 & 7.
123.00 Set a post for $\frac{1}{4}$ sec. cor. from which,

Pine 10 ins. dia. bears N. 49° W. 67 lks.

Juniper 18 ins dia. bears S. 21° W. 282 lks.

RECEIVED AND
FILED

APR 13 1988

OFFICE OF COUNTY SURVEYOR
Robert D. Baggett
Attest: *John L. W. 1988*

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
D. Buck

March 18, 1988

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT.
598

Grant County Surveyor

EVIDENCE FOUND:

I did not find the original corner post.

The corner position is established at record distance from the two original bearing trees.

From the corner point:

The root hole from a dead and down P. Pine, badly deteriorated, about 14 ins. diam., bears N. 45° W., 44.2 ft. Scrib visible in blaze.

A juniper stump burned out by fire, 18 ins. diam., bears S. 16° W., 186.1 ft., no marks remain.

See Map of Survey No. 1033.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a 1 $\frac{1}{2}$ " x 30" galvanized iron pipe 25 ins. in the ground, with brass cap marked as shown, **MONUMENT MARKED** from which I scribe NEW BT's.

A Ponderosa Pine, 20 ins. diam., bears S 40° W., 135.1 ft., marked $\frac{1}{4}$ S7 CSBT.

A Ponderosa Pine, 26 ins. diam., bears N. 27° W., 75.2 ft., marked $\frac{1}{4}$ S6 CSBT.

Surrounded monument with a mound of stone, 3 ft. base to top of cap.

Attached County Surveyor BT tags to BT's and painted blazes with tree marking paint. Used magnetic compass with 20° E. variation and steel tape, measuring distance to 40d nail driven in side center of new BT's at root crown.

