


CORNER RESTORATION

CORNER ^{SE cor.} Sec 6 TWP 7S RANGE 29E WM

ORIGINAL SURVEY BY: Frank W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

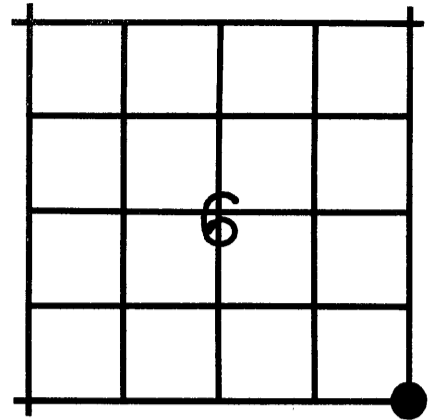

ORIGINAL DESCRIPTION:

Set a basalt stone 24x18x15 in. in mound of stone for cor to secs. 5,6,7,8.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
D. Buck

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT.
598

March 18, 1988

Grant County Surveyor

EVIDENCE FOUND:

I found the original basalt corner stone, 24x18x15 inches marked with 5 notches on east edge, firmly set in a mound of stone.

RECEIVED AND
FILED

APR 13 1988

OFFICE OF COUNTY SURVEYOR
Attest: *John L. ...*


See Map of Survey No. 1033.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a 1 1/2" x 30" galvanized iron pipe 15 ins. in the ground, with brass cap marked as shown, from which I scribe NEW BT's: MONUMENT MARKED

- A juniper, 17 ins. diam., bears N.16°E., 25.6 ft., marked T7S R29E S5 CSBT.
- A juniper, 9 ins. diam., bears S.62°E., 103.9 ft., marked T7S R29E S8 CSBT.
- A P. Pine, 18 ins. diam., bears S.71°W., 138.2 ft., marked T7S R29E S7 CSBT.
- A P. Pine, 21 ins. diam., bears N.70°W., 47.0 ft., marked T7S R29E S6 CSBT.

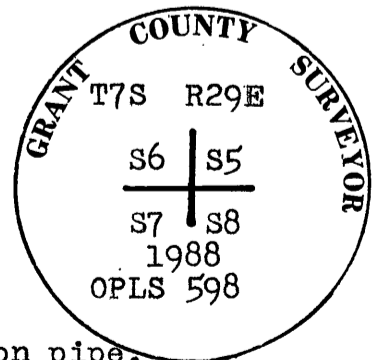

Buried original corner stone South and alongside iron pipe.

Attached County Surveyor BT tags to BT's. and painted blazes with red tree marking paint. Used magnetic compass with 20°E. variation and steel tape, measuring distance to a 40d nail driven in side center of BT's. at root crown.

Surrounded monument with mound of stone, 5 ft. base to top of cap.