


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by Meldrum and Campbell, Contract No. 380, 1881,

Set a basalt stone, 18x8x8 in a mound of stone for 1/4 sec. cor.

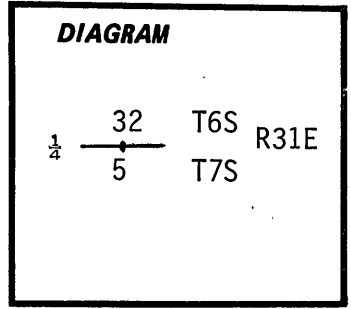

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

Corner point determined by survey and single proportionate measurement between the NW corner of Sec. 5 and the NE corner of Sec. 5, T7S, R31E, as previously established during this survey, said location agreeing with original topographic calls.

At the corner point, we set a 2"x30" Galvanized Iron Pipe, 14" in the ground to bedrock and supported in a mound of stone, 8 ft. dia. to the top of the pipe, with brass cap attached, marked:

From which we mark the following accessories:

A 12" Juniper, scribed "1/4 S32 BT" on a double blaze bears N77°E 61.9 ft.,

And an "+B0" chiseled 2 ft. above ground on a vertical bedrock face (outcrop measures 6'x3'x4' high) bears S44°E 107.7 ft. Attached brass washer to lower blaze of new BT.

Corner location established and perpetuated in accordance with our survey contract.

Magnetic Compass (Declination 18 1/2° East)
Steel Tape

August 19, 1982

Witnesses: Gary Langlitz
Greg Orton
Jeff Anderson

T6S
S32 R
1/4 ——— 31
S5 E
T7S
PLS 1099
1982

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Gary L. Langlitz

OREGON
JULY 22, 1977
GARY L. LANGLITZ
1099

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of Jan, 1983
Robert D. Baggett by Gary L. Langlitz
(COUNTY OFFICIAL) (DEPUTY)