


received and

FILED

NOV. 27, 2002

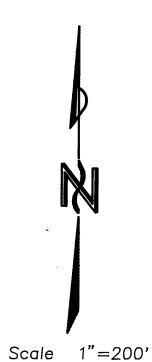

BASIS OF BEARINGS

Survey No. 613 As Shown

LEGEND

- Found 2½" iron pipe with attached 3½" BLM brass cap, see Survey No. 613.
- O Set 5/8"x30" iron pin with attached 2" aluminum cap marked CORNERSTONE SURVEYING, INC., see corner restoration records for details.
- () GLO record bearing and distance.
- 1() Survey No. 613 record bearing and distance.

NARRATIVE

This survey was performed at the request of Gary Thomas. The purpose of this survey was to establish the S1/16 corner between sections 27 and 28.

A search was made of the available records pertaining to this survey. Field measurements were made to locate the BLM corners as shown. The S1/16 corner was set on line between the found BLM monuments and at the mid point. A certified corner restoration record sheet was filed separately, which gives a detailed description of the accessories taken at the S1/16 corner.





CORNERSTONE SURVEYING, Inc.

233 S. Canyon Blvd., John Day, Oregon 97845 (541) 575—1813

MAP OF SURVEY
SITUATED IN THE SW1/4 OF SECTION 27
T14S, R31E, W.M.

GRANT COUNTY, OREGON

SURVEYED FOR: Gary Thomas

SURVEYED BY : Jack Watson

DRAWN BY : Jack Watson

Date: 11/15/2002