


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner first set by Henry Meldrum in 1881, under contract No. 380, dated March 19, 1881. Set a basalt stone 16" X 12" X 10" from which bear;

- A Pine 30" dia. N.47°E., 75 lks.
- A Pine 20" dia. S.30°E., 55 lks.
- A Pine 16" dia. S.17°E., 78 lks.
- A Pine 20" dia. N.62°W., 120 lks.

In 1972, D.M. Ferguson remonumented the Corner setting a 3" brass cap in a 2½" X 30" iron pipe and set Cornerstone alongside and on West side of pipe. He found: 40" pine N.47°E 52' with healed blazes. 30" pine S.30°E., 36.5' with scribing visible. 30" pine S.17°W., 50.7', with healed blazes. Rotten log bearing approx. N.62°W., 75'. B.T's. he set; Pine 9" N68°E., 25.7', mkd. T7SR31ES30BT.
 Pine 10" S.38°W., 8.3', mkd. T7SR30ES36BT.
 Pine 20" N.19°W., 29.1', mkd. T7SR30ES25BT.

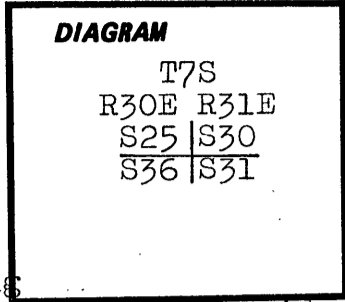


Description of corner evidence found:

- 3" diam. brass cap set in a 2½" iron pipe extending 6"+ above ground. Stone on West side and alongside pipe. Cap mkd. per sketch. Steel post, 4'+ North.
 - 12" D.B.H. (10") Ponderosa Pine, S.33°W., 8.3', w/partially healed dbl. blaze and scribing.
 - 9" D.B.H. Ponderosa Pine, N.68°E., 25.7', partly healed dbl. blaze w/scribing.
 - 20" D.B.H. Ponderosa Pine, N. 19°W., 29.1', dbl. blaze w/scribing. Dead and broken top, 25'+ snag.
 - 40" D.B.H. (30") Ponderosa Pine snag; N.47°E., 52' (75 lks.) w/healed blazes.
 - 30" D.B.H. (20") Ponderosa Pine, in fence, S.30°E., 36.5', (36.3') healed blazes.
 - 30" D.B.H. (16") Ponderosa Pine, S.17°W.(S.17°E.) 50.7'(78 lks.) w/healed blazes.
- Distances to Ferguson trees are to brass washer in lower blaze.

T7S
R30E R31E
S25 S30
S36 S31
1972
PLS 848

Description of monument and accessories established to perpetuate the original location of this corner:

13" D.B.H. Ponderosa Pine, N.6°W., 44.4', scribed T7SR30ES25BT.
 Set a brass washer mkd. RPLS 1910 between B&T..
 All B.T's. have B.T. tags, attn. signs, bands and faces painted red.
 Distances are measured to center of tree 1' above the root crown.
 Bearings are Magnetic North, 20° East declination.

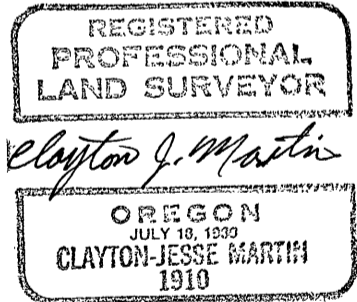

C.J. MARTIN SURVEYING
 2751 JUNIPER ST.
 SWEET HOME, OR 97386

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 10 day of April, 1986
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)