

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


E-9

History of original corner establishment:

(CONTINUED)

FROM WHICH

- A PINE, 11 ins. diam., BEARS N. 68 1/2° E., 70 lks dist., mkd. T7S R32E S4 BT
  - A PINE, 12 ins. diam., BEARS S. 30 3/4° E., 78 lks dist., mkd. T7S R32E S 9 BT
  - A PINE, 8 ins. diam., BEARS S. 83 1/4° W., 49 lks. dist., mkd. T7S R32E S 8 BT
  - A PINE, 11 ins. diam., BEARS N. 29 1/2° W., 60 lks dist. mkd. T7S R32E S 5 BT
- DEPOSIT CORNER STONE ALONG SIDE POST.

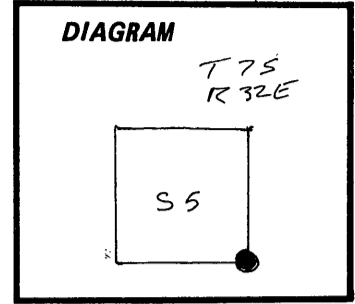

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 27 day of Feb, 1991  
Robert D. Sayer by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)