


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

---

History of original corner establishment: Index: N-17  
 Corner, Secs. 14, 15, 22 and 23, T.7S., R.32E., W.M.  
 Township originally subdivided by Rufus Moore under  
 Contract No. 382 dated March 23, 1881. 1 DIAGRAM 1  
 A retracement survey was made by 1 BLM brass cap 1  
 the BLM under assignment instructions dated 1967. 1 T7SR32E 1  
 Their record reads: 1 S151S14 1  
 The cor. of secs. 14, 15, 22, and 23, determined from 1 ----- 1  
 the original bearing trees: 1 S221S23 1  
 A pine, 20 ins. diam., bears N. 17°E., 149 lks. dist., 1 1967 1  
 with healed blaze. 1 1  
 A pine, 28 ins. diam., bears S. 25°W., 104 lks. dist., 1 1  
 with healed blaze. 1 1  
 A pine, 30 ins. diam., bears N. 48°W., 66 lks. dist., with fragmentary  
 scribe marks visible on partially opened blaze. At the corner point  
 Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground,  
 and in a mound of stone, 2 ft. base, to top, with brass cap mkd.(diagram).  
 from which new bearing trees  
 A pine, 8 ins. diam., bears N.21°E., 114 lks. dist., mkd. T7SR32ES14BT.  
 A fir, 7 ins. diam., bears S.70°E., 77 lks. dist., mkd. T7SR32ES23BT.  
 A fir, 8 ins. diam., bears S.86°W., 86 lks. dist., mkd. T7SR32ES22BT.  
 A fir, 6 ins. diam., bears N.29°W., 65 lks. dist., mkd. T7SR32ES15BT.

Description of corner evidence found:  
 Found the corner monument as described from which:  
 A 22" dbh Ponderosa Pine bears N.17°E., 98.3' with healed blaze.  
 A 10" dbh Ponderosa Pine bears N.21°E., 75.2' with visible scribe.  
 A 11" dbh Douglas Fir bears S.70°E., 50.8' with visible scribe.  
 A 10" dbh Douglas Fir bears S.86°W., 43.6' with visible scribe.  
 A dead 9" dbh Douglas Fir bears N.29°W., 42.9' with healed blaze.  
 A 28" Ponderosa Pine stump bears S.25°W., 68.6' with healed blaze.  
 A 30" Ponderosa Pine stump bears N.48°W., 43.6' with healed blaze.

Description of monument and accessories I established to perpetuate the  
 original location of this corner:  
 Set new bearing trees as follows:  
 A 9" dbh Western Larch bears N.33 1/2°W., 62.4' scribed T7SR32ES15BT.  
 The bearings were based on the record bearings to the existing BT's.  
 An aluminum washer stamped RLS 852 is nailed between the letters B and T  
 on the new tree. All the BT's have LSM and BT signs attached  
 Painted 6" red bands around all the trees and painted the  
 scribe blazes red.  
 This work was done August 25, 1993.

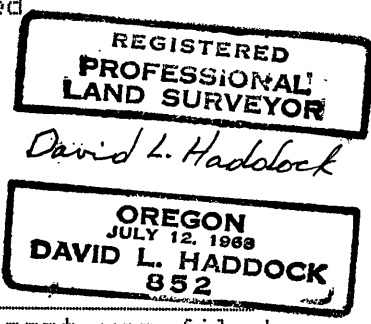

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed  
 in this office for record on the 16 day of March, 1994.  
Robert J. Bayart by \_\_\_\_\_  
 ( COUNTY OFFICIAL ) ( DEPUTY )