


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Unsurveyed- Subdivided Section



No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

NONE.

Description of monument and accessories established to perpetuate the original location of this corner

Set 2 1/2" x 30" iron pipe 26" in ground with brass cap marked as shown from which I scribed bearing trees.


- A pine 11in. diam. brs. N 29°51' E 49.25ft. marked C 1/4 S6 BT
- A pine 12in. diam. brs. S 67°19' W 45.96ft. marked C 1/4 S6 BT

Nailed brass washer marked PLS 933 to BT blaze of trees. Set steel post 4ft. South of corner. Used T-2 and steel tape, measuring a horizontal distance to the center of bearing trees.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David H. Krumbein

OREGON
JULY 17, 1970
DAVID H. KRUMBEIN
933

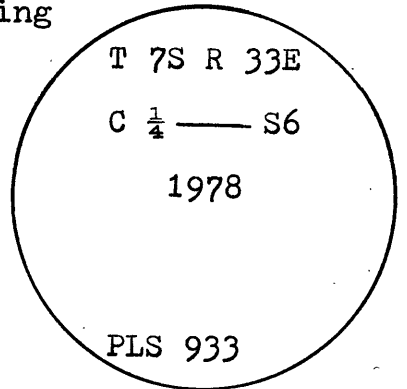

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 20 day of Sept 1978
Robert D. Begett by _____
 (COUNTY OFFICIAL) (DEPUTY)