

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


The corner was originally established by Eugene McCornack under Contract No. 398 dated July 2, 1882.

The original notes state that at the corner:

A 4 in. square by 4 ft. marked post, set 24 in. in the ground for the corner, from which:

A 8 in. dia. Pine bears N35°E - 14 lks (9.2 ft.) marked: T7S R35½E S9 BT

A 8 in. dia. Pine bears S35°E - 31 lks (20.5 ft.) marked: T7S R35½E S16 BT

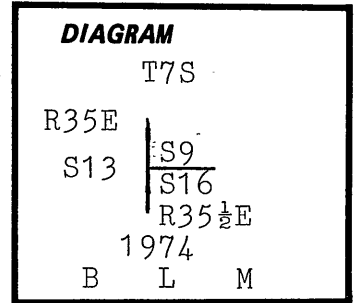

For history of 1974 BLM remonumentation, see attached sheet.

Description of corner evidence found:

A 3½ in. brass cap on an iron pipe, protruding 10 in. out of the ground, set by BLM in 1974, marked as per diagram, from which:

A 5½ in. dia. Lodgepole Pine bears N36°E - 9.9 ft. with visible scribing.

A 9 in. dia. Lodgepole Pine bears S35°E - 20.5 ft. with visible scribing.

Description of monument and accessories established to perpetuate the original location of this corner:

Attached 54-3 and 54-4 signs to bearing trees. Painted the face of the blaze and a 6 in. band around each bearing tree red.

Set a steel fence post, with 54-2 and 54-4 signs attached, South of the monument.

Used a steel tape and a magnetic staff compass, with 20° East declination. Measured to the center of the bearing trees.

This corner was maintained on September 15, 1983.

Witnessed by: Robert D. English
Aaron C. Hoeft

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Office of..... County Surveyor..... County of..... Grant
State of..... Oregon..... I hereby certify that the within instrument was filed in this office
for record on the... 15... day of... Sept... 19...
Robert D. English by
(COUNTY OFFICIAL) (DEPUTY)