


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-15

History of original corner establishment:

1884, Herman D. Gradon, under contract No. 499, established the corner. He set a post 3' long & 3" square, 24" in the ground, from which:
5" Pine bears, N. 30° W., 19 lks.
6" Pine bears, S. 41° W., 17 lks.

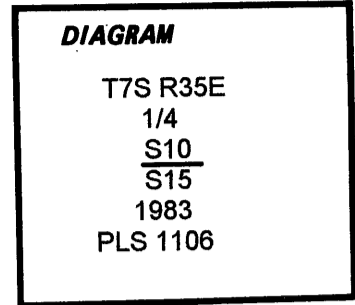

1983, William R. Wells, Registered Land Surveyor No. 1106, in Grant County Map Survey No. 836, found the Original BT's:
9 1/2" Pine snag bears, N. 25° W., 19 lks., open blaze and visible scribing.
10 1/2" Pine snag bears, S. 49° W., 17 lks., open blaze and visible scribing.
Using distance-distance intersection from the found BT's, He reset the corner using a 2 1/2" by 30" aluminum pipe, with 2 1/2" aluminum cap, set 28" in the ground with a mound of earth to the cap, and marked New BT's:
10" Fir bears, S. 61 1/2° W., 29.4 feet.
8 1/2" Fir bears, N. 14° E., 17.1 feet.

Description of corner evidence found:

Found a 2 1/2" aluminum pipe, with 2 1/2" aluminum cap, projecting 1" out of a 2' diameter ring of stone, from which:
9" downed Lodgepole Pine snag bears, N. 25° W., 12.5 feet, with partially healed blaze (original BT).
10" Douglas Fir bears, N. 15 1/2° E., 17.1 feet, scribing "4S10BT" visible on partially healed blaze, with a 3/4" diameter brass washer marked "PLS 1106" nailed into bottom circle of scribed "B".
12" downed Lodgepole Pine snag bears, S. 49° W., 11.2 feet, scribing "S BT" visible on partially healed blaze (original BT).
11" Douglas Fir bears, S. 61 1/2° W., 29.4 feet, scribing "1/4 S15 BT" visible on partially healed blaze, with a 3/4" diameter brass washer marked "PLS 1106" nailed into bottom circle of scribed "B".


Description of monument and accessories established to perpetuate the original location of this corner:

Marked New BT's:
5" Douglas Fir bears, S. 24° E., 17.7 feet, marked "1/4 S15"BT".
7" Douglas Fir bears, N. 52 1/2° W., 23.4 feet, marked "1/4 S10"BT".

BT's are double blazed and have a brass washer marked "RLS 2308" nailed to the lower blaze by the BT scribing.

Magnetic Declination: 20° East

Work performed by: David A. Schlaich (RLS 2308)
Date: October 1993

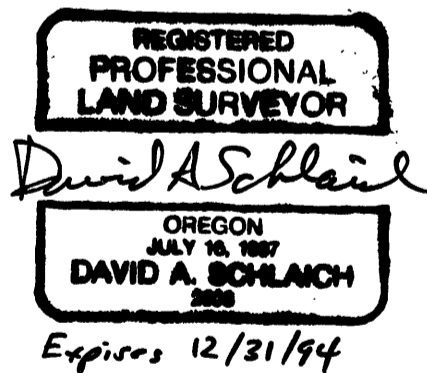

Office of... Surveyor County of... Grant
State of... Oregon, I hereby certify that the within instrument was filed in this office
for record on the... 2 day of... Feb, 19... 94
Robert D. Sargent by (DEPUTY)
(COUNTY OFFICIAL)