


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

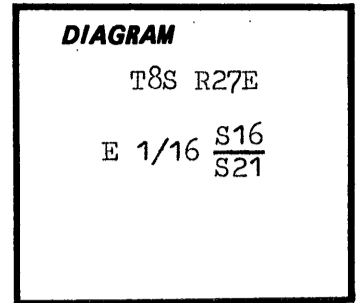

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner:


Set 2 1/2"x30" alum. pipe with a 3" alum. cap 4" in ground in a mound of stone and earth 5' base to top.

T8S R27E  
E 1/16  $\frac{S16}{S21}$   
1992  
LS 896

Marked:

14" Pine--N34E 65.8' Scribed E 1/16 S16 BT.  
20" Pine--S48 1/4 E 54.4' Scribed E 1/16 S21 BT.

Nailed 54-9 and 54-3 signs to BT's, painted bands and blazes red and nailed a 1" brass disk stamped PLS 896 flush between the B and the T.  
Set guard posts West and South with 54-9 and 54-2 signs.  
Dec. 20.

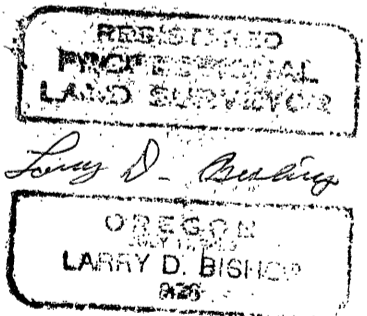

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 20 day of JAN, 1993  
Robert D. Bishop by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)