


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

R-5

History of original corner establishment:

Corner was originally established by Deputy Aaron F. York in 1878 under contract #309. Set stone 15"x14"x5" and raised mound of stone at corner.

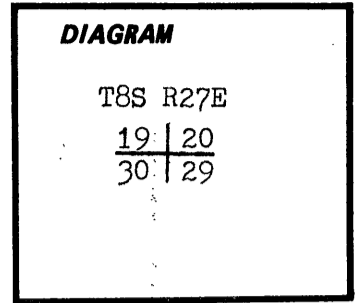

Description of corner evidence found:

Stone 14"x17"x5" with 5 notches on East and 2 grooves on North one chain South of ridge top. No mound of stone. (Record above)

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2 1/2"x30" alum. pipe with a 2 1/2" alum. cap 8" in ground in a mound of earth and stone 4' base to top. Stamped:

T8S R27E  
S19 | S20  
S30 | S29  
1993  
LS 896

Marked:

20" Juniper N48 1/2 W--65.9' Scribed T8S R27E S19 BT.  
16" Juniper S53 1/2 W--67.8' Scribed T8S R27E S30 BT.  
30" Juniper S76 1/2 E--115.9' Scribed T8S R27E S29 BT.  
32" Juniper N65 E--93.1' Scribed T8S R27E S20 BT.  
Nailed 54-3 and 54-9 signs to BT's, painted bands and blazes red and nailed a 1" brass disk stamped PLS 896 flush between the B and the T.  
Set guard post with 54-9 sign NW.  
Buried original stone on SW edge of mound.  
Dec.20.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Larry D. Bishop*

OREGON  
JULY 17, 1922  
LARRY D. BISHOP  
8128

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 12 day of Nov, 1993  
Robert D. Bissett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)