

CORNER RESTORATION


CORNER: W1/4 Sec 6 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: A.F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Henry Meldrum under contract No. 380 dated Mar. 19, 1881.

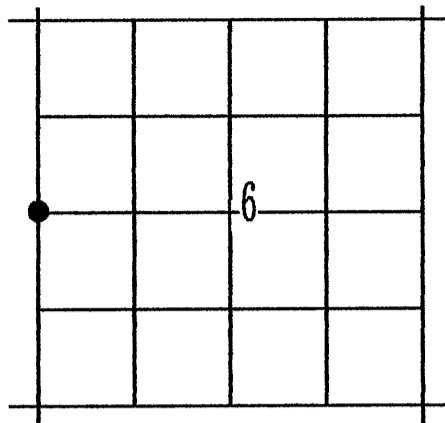

ORIGINAL DESCRIPTION: Set stone 12x12x10 for 1/4 Sec. Cor. Raised stone mound at Cor.

Retracement by Meldrum: 40.65 Ch. to a point 12lks. E. of 1/4 sec. cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

April 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 10"x8"x7" marked 1/4 on one face, set northeast of dim mound of stones.

Corner is 3' northeast of corner of fences running North, South, and West.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.**

At the corner point: I set a 1½"x30" galv. iron pipe, 28" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:
A Juniper 5"diam., bears N34°E, 80.8 ft. marked 1/4S6 CSBT.
A Juniper 6"diam., bears S51°E, 156.0 ft. marked X CSBT.
A Juniper 13"diam., bears S48°W, 57.4 ft. marked 1/4S1 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR
T8S
¼
R27E R28E
S1 | S6
1995
OPLS 598

Also: I SET A NEW REFERENCE POINT:
A 5/8"x30" iron pin, bears N51°W, 5.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

Buried marked stone east and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.