


CORNER RESTORATION

N $\frac{1}{4}$ cor.
CORNER Sec. 35 TWP 8 S. RANGE 28 E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

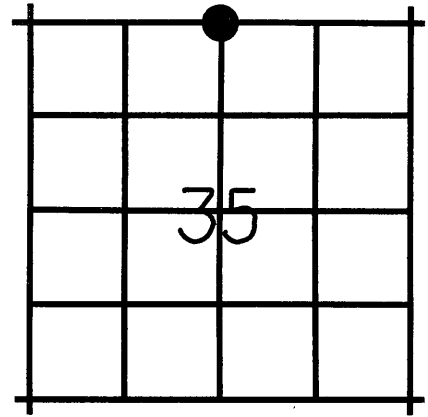

ORIGINAL DESCRIPTION: S. $89^{\circ} 39'$ W., on a true line between Secs. 26 and 35.
40.16 chs. set a basalt stone 22x16x10 in a mound of stone for $\frac{1}{4}$ sec. cor.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson
J. L. Meyerholz

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

June 23, 1984

Grant County Surveyor

EVIDENCE FOUND:

Found original basalt corner stone 22x16x10 inches,
marked $\frac{1}{4}$ on N. face, (stone had tipped over on marked
face), set in a ring of stone.

RECEIVED AND
FILED

JUN 27 1984

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
Attest: *Lennie Lawrence*

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a $1\frac{1}{2}$ "x30" galvanized iron pipe,
18 inches in the ground with brass cap marked as shown,
from which I scribe NEW BEARING TREES:

A Juniper 16" diam., bears N. 76° E., 34.2 ft.,
mkd. T8SR28E $\frac{1}{4}$ S26 CSBT.

A Juniper 7" diam., bears South 28.4 ft., mkd. $\frac{1}{4}$ S35 CSBT.

Buried corner stone East and inverted alongside the iron
pipe and surrounded pipe with a mound of stone, 4 ft. base
to top of cap.

Used magnetic compass and steel tape, measuring to head of a
40d nail driven flush with the BT blaze at root crown of
bearing trees.

Attached Grant County Surveyor BT tags to BTs and painted blazes
with red timber marking paint.

MONUMENT MARKED

