


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not prev. established.

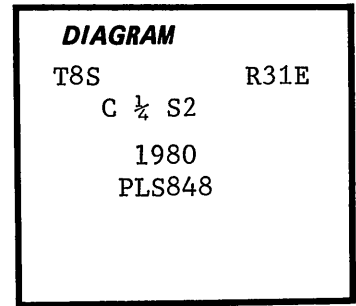

Description of corner evidence found:

N.A.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 14" in ground & raised mound of stone around pipe. Stamped brass cap as shown in diagram.

From which:

A pine 15" dia bears N 7 E 73.6 ft. scribed C 1/4 S2 BT.

A juniper 14" " " N 80-30 E 76.9 ft. " " " "

Nailed brass washers stamped PLS848 & bearing tree signs to each tree, painted red band around each tree. Set steel post with warning & bdry signs 5' S & 5' E from corner.

Bearing-Solar Grid

Witnesses to above corner

D. Herburger
L. Wyllie

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*81*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)