


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corners not previously established.

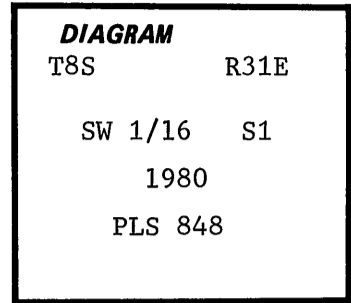

Description of corner evidence found:

N.A.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 18" in ground & placed a ring of stones around the pipe. Stamped brass cap as shown in the diagram.  
 From which:  
 A pine 10" dia. bears N 66-30E 7.6 ft scribed SW 1/16 S1 BT.  
 A " " " " S 37-30 W 29.0 ft. " " " " "  
 Nailed brass washers stamped PLS 848 & bearing tree signs to each tree.  
 Painted red band around each tree.  
 Set steel posts with warning & bdry. signs 5'E & 5'N from corner.  
 Bearing-solar grid.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*  
 OREGON  
 JULY 12, 1968  
 DOUGLAS M. FERGUSON  
 848

Witnesses to above corner.

D. Herburger

L. Wyllie

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 12 day of Jan, 1981  
Robert D. Baggett by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)