


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner not prev. established.

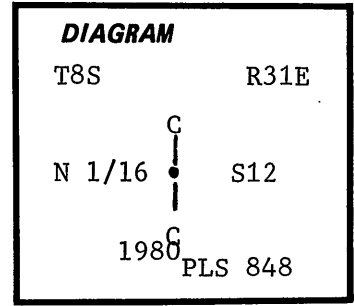

Description of corner evidence found:

N.A.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 18" in ground & raised mound of stone & earth around pipe. Stamped brass cap as shown in diagram.

From which:

A pine 10" dia bears N 64W 76.3 ft. scribed CN 1/16 S12 BT.

A pine 10" dia bears N 40-30 E 30.5 ft. " " " " "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry signs 5'E & 5' S from corner.

Bearing-Solar Grid

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Douglas M. Ferguson*  
OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848

Witnesses to above corner

D. Herburger

L. wyllie

Office of... *Surveyor* ... County of... *Grant* ...  
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office  
for record on the... *12*... day of... *Jan* ... 19... *81* ...  
*Robert O. Segitt* by .....  
(COUNTY OFFICIAL) (DEPUTY)