


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

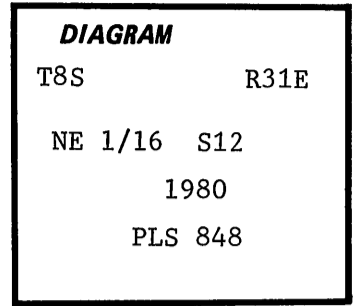

Description of corner evidence found:

N.A.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 12" in the ground & raised a mound of stone & earth around pipe. Stamped brass cap as shown in diagram.

From which:

A juniper 10" dia bears N 61 W 44.5 ft scribed NE 1/16 S12 BT

A pine 11" dia. bears S 84 E 43.2 ft. " " " " "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & 'bdry. signs 6'W & 6'N from corner.

Bearing-Solar Grid

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Witness to above corner

D. Herburger
L. willie

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*81*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)