


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not prev. established.

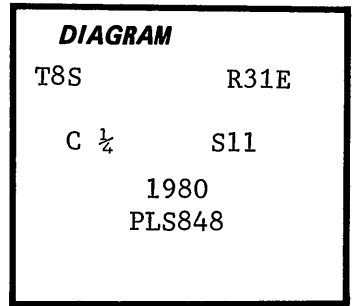

Description of corner evidence found:

N.A.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 16" in ground & raised a mound of stone around pipe. Stamped brass cap as shown in diagram.
From which:
A pine 10" dia bears N 55-30 E 15.2 ft. scribed C 1/2 S11 BT
A " " " " S 3-30 W 21.6 ft. " " " "
Nailed brass washers stamped PLS848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry. signs 5'N & 5'E from corner.
Bearing-True Grid.

Witnesses to above corner

D. Herburger
L. Wyllie

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*81*
Robert D. Bapth by _____
(COUNTY OFFICIAL) (DEPUTY)