


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

T.8S., R.31E., INDEX Q-17

**History of original corner establishment:**

This corner not previously established.



**Description of corner evidence found:**

**Description of monument and accessories I establish to perpetuate the original location of this corner:**

At the position determined by survey (See Map of Survey No. 1707), set a 2-1/2" x 30" aluminum pipe monument w/3" dia. cap stamped as shown in the DIAGRAM, 3" in the ground, raised a 3-1/2' dia. x 2-1/2' high mound of earth and stone, from which:

- A Juniper, 10" dia. bears S82°00'W, 61.0 ft., scribed S1/16 S22 BT
- A Juniper, 8" dia. bears S47°30'E, 78.4 ft., scribed S1/16 S23 BT

**DIAGRAM**


Painted red bands around BT's and painted blaze faces.  
 Placed Land Survey Monument signs and Bearing Tree tags on each BT.  
 Attached a Brass washer stamped "PLS 848" to the blaze face of the new BT's.

T8S R31E  
 S1/16  
 S22 | S23  
 2003  
 PLS 848

Measurements to accessories taken with a magnetic compass, declination 20° East, and distances measured with nylon clad steel tape.

I hereby certify that the above corner point was perpetuated as shown hereon on May 9, 2003

Witness: D. Mitchell Ferguson, LSIT  
Brad Cates, LSIT

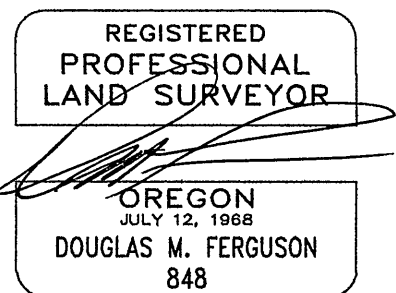

Office of County Surveyor \_\_\_\_\_ County of Grant  
 State of Oregon. I hereby certify that the within instrument was filed in this office  
 for record on the 10 day of Aug, 2004  
Robert D. Ferguson by \_\_\_\_\_  
 County Surveyor Deputy

RENEWAL DATE:  
01/01/2006