

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Eugene P. McCormack under GLO contract No. 398 dated July 2, 1881.

Surveyor's General records state:

Set a basalt stone 20 x 10 x 8 ins. 15 ins. in the ground for 1/4 sec. cor. marked 1/4 on W face; from which:

- A pine 48 ins. diam. bears East, 73 lks dist marked 1/4 S BT.
- A pine 10 ins. diam. bears N 55° W., 9 lks dist marked 1/4 S BT.

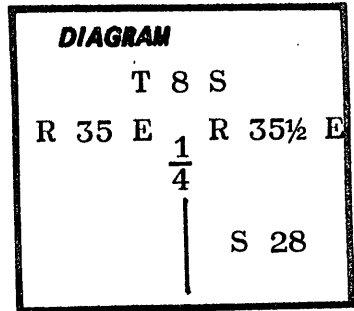


Description of corner evidence found:

A sawed pine stump 46 ins. diam. for section 28 BT. (no visible scribes)
At record location as determined by the bearing tree stump found a broken basalt stone (now 13 x 8 x 6 ins.) marked 1/4.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2 1/2 in. brass cap on a 2 in. iron pipe 31 ins. long 28 ins. in the ground with a surrounding rock mound.

Brass cap marked thus:

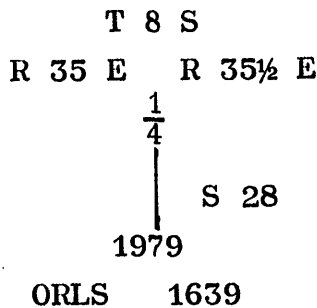

New bearing trees:

- A pine 10 ins. diam. bears S 82° E., 20.5 ft. dist. marked 1/4 S 28 BT.
- A pine 8 ins. diam. bears S 22° E., 28.0 ft. dist. marked X BT.

I hereby certify the above corner monument was properly re-established by me on Sept. 6, 1979 and witnessed by John Mitchell and Don Pedracini.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

William L. Hanley

OREGON
JULY 14, 1978
WILLIAM L. HANLEY
1639

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 24 day of Sept, 1979
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)