

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by W. B. Barr under G.L.O. contract number 492, dated August 22, 1883.

Set a pine post 3 ft. long, 3 ins. square 2 1/4 ins. in the ground for 1/4 sec. cor. marked 1/4 S on W. face from which;

A pine 12 ins. diam. bears N. 40° E., 58 lks. dist. marked 1/4 S BT

A tamarack 2 1/4 ins. diam. bears N. 35° W., 36 lks. dist. marked 1/4 S BT

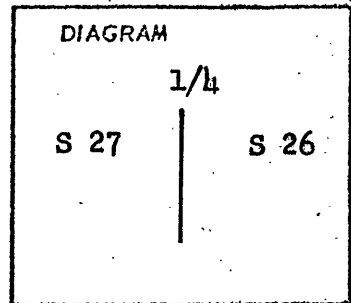

Description of corner evidence found:

A 13 in. pine with full scribing on an open blaze marked 1/4 S BT bears N 40° E., 37.3 ft (58 lks)

A decayed piece of tree with obvious blaze marks and definite scribe marks which are not legible bears N 35° W., 23.8 ft. (36 lks)

Corner post not found.

Description of monument and accessories established to perpetuate the original location of this corner

Set a 2 1/2 in. brass cap on a 1 in. iron post 6 ins. above the ground in earth mound marked:

T 8 S R 35 1/2 E
 1/4
 S 27 | S 26
 1977
 RPE 2808

New Bearing Trees:


A larch 8 ins. diam. bears N 33° E., 25.75 ft. dist. marked 1/4 S 26 BT with a brass washer marked RPE 2808 nailed flush with BT blaze.

A fir 10 ins. diam. bears S 35° 30' W., 23.75 ft. dist. marked 1/4 S 27 BT with a brass washer marked RPE 2808 nailed flush with BT blaze.

Attached a location tag to a 3 1/4 in. pine on west edge of a logging road from which the corner bears S 78° W., 80 ft. dist.

Corner monumented March 15, 1977

Office of County Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 28 day of Feb, 1978.
Robert D. Bryant by James D. Hanley
 (COUNTY OFFICIAL) (DEPUTY)

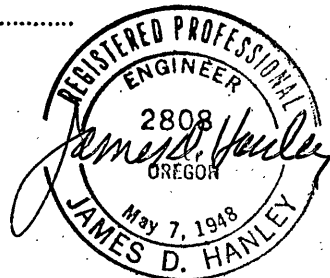

T-17