


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 15x10x7 for 1/4 Sec Cor

Raised stone mound at Cor

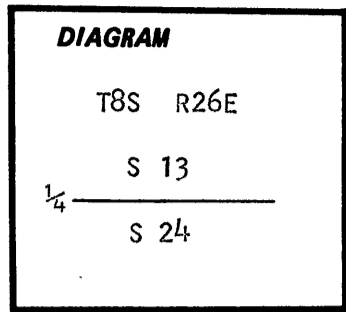

Description of corner evidence found:

Found stone 15x9x7 marked 1/4 in mound of stone

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of stone, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New BTs

A 12 inch diameter P.Pine bears N48°E, 48.0 feet marked 1/4 S13 BT

A 12 inch diameter P.Pine bears S57°E, 27.2 feet marked 1/4 S24 BT

Raised mound of stone around monument


Buried original stone South and alongside of monument

Set steel fence post approximately 5 feet West of monument with 54-4 sign attached

Corner set May 23, 1984

Witnesses: Greg Blackman and Rick Robinson

See map of survey dated June, 1984

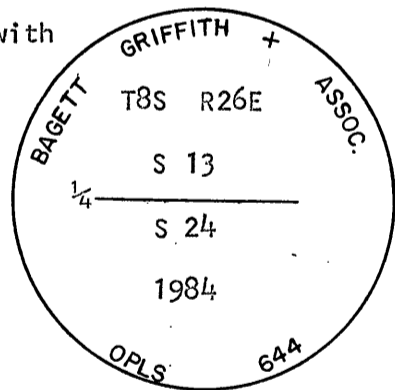

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 15 day of August, 1984
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)