


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 10x8x8 for 1/4 sec cor

Raised stone mound at cor

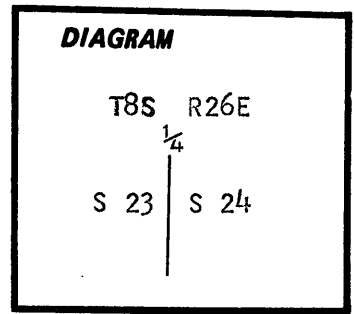

Description of corner evidence found:

Found stone 10x5x5 (approximately) in small mound of stone)

Stone is broken into 4 or more pieces. I found chisel marks on the pieces.

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of stone, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 10 inches in the ground, from which:

New BTs

A 26 inch diameter P.Pine bears N39°E, 123.7 feet marked 1/4 S24 BT

A 8 inch diameter Juniper bears N54°W, 51.0 feet marked 1/4 S23 BT


Buried original stone North and alongside of monument

Raised mound of stone around monument

Set steel fence post approximately 5 feet South with 54-4 sign attached

Corner set June 13, 1984

See survey dated June, 1984

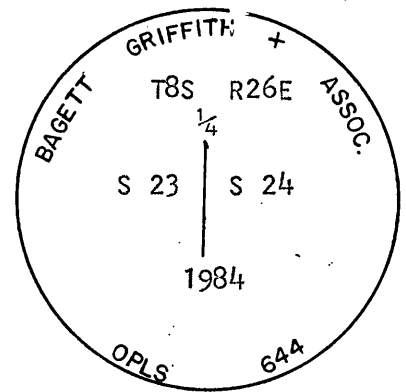

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *15* day of *August*, 19*84*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)