


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

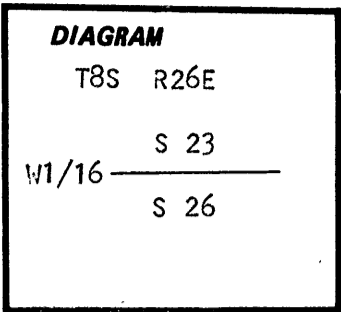

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner point, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which:

New BTs


A 12 inch diameter Juniper bears S54°W, 20.0 feet marked W1/16 S26 BT

A 12 inch diameter Juniper bears N10°W, 83.0 feet marked W1/16 S23 BT

Raised mound of stone around monument

Set steel fence posts approximately 5 feet East with 54-2 sign attached and approximately 5 feet North with 54-9 and 54-2 signs attached

Corner set June 11, 1984  
see survey dated June, 1984

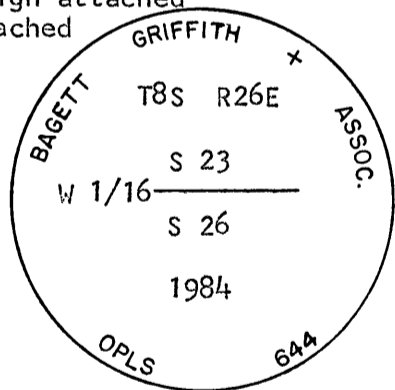

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the 3T blaze.

Office of..... *Surveyor* ..... County of..... *Grant* .....  
State of..... *Oregon* ..... I hereby certify that the within instrument was filed in this office  
for record on the..... *15* day of..... *August* ..... 198*4*.  
..... *Robert D. Baggett* by.....  
(COUNTY OFFICIAL) (DEPUTY)